


- 249-528Vac
-
- I_{max} 20kA 8/20μs
- I_n 10kA 8/20μs
- UL1449 Type 5
- IEEE C62.41.2 C
- 85°C
-

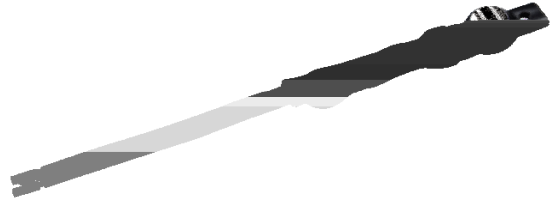

PS-20KS10KHT

LED

	277 Vac	-	480 Vac	
(MCOV) ⁽¹⁾	-	-	550 Vac	
	47 Hz	-	63 Hz	
(I _n) ⁽²⁾	-	-	10 kA	
(I _{max}) ⁽³⁾	-	-	20 kA	
(U _{oc}) ⁽⁴⁾	-	-	20 kV	
(L-N) ⁽⁵⁾	-	-	3000 V	20kV/10kA 1.2/50 μs 8/20 μs
(L-G N-G) ⁽⁵⁾	-	-	3000 V	20kV/10kA 1.2/50 μs 8/20 μs
	20 kA	1	-	-
	10 kA	15	-	-
	4 kA	100	-	-
	2 kA	500	-	-
	1 kA	1000	-	-
	-	60 g	-	


- 1 (MCOV) SPD
- 2 (I_n) SPD 15 8/20μs SPD
- 3 (I_{max}) SPD 8/20μs SPD
- 4 (U_{oc}) 2


5

(Uoc)

	-40 °C	-	+85 °C	
	-40 °C	-	+85 °C	≤ 75%RH
	-10 °C	-	+40 °C	≤ 75%RH

UL/CUL	UL 1449: Transient Voltage Surge Suppressors, CSA-C22.2 No. 269.5
IEEE C62.41	Guide on the Surge Environment in Low-Voltage (1000 V and Less) AC Power Circuits

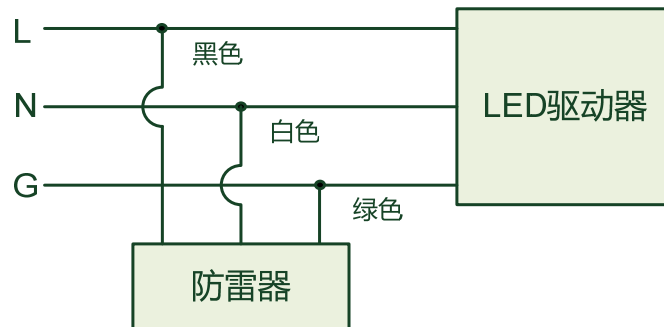

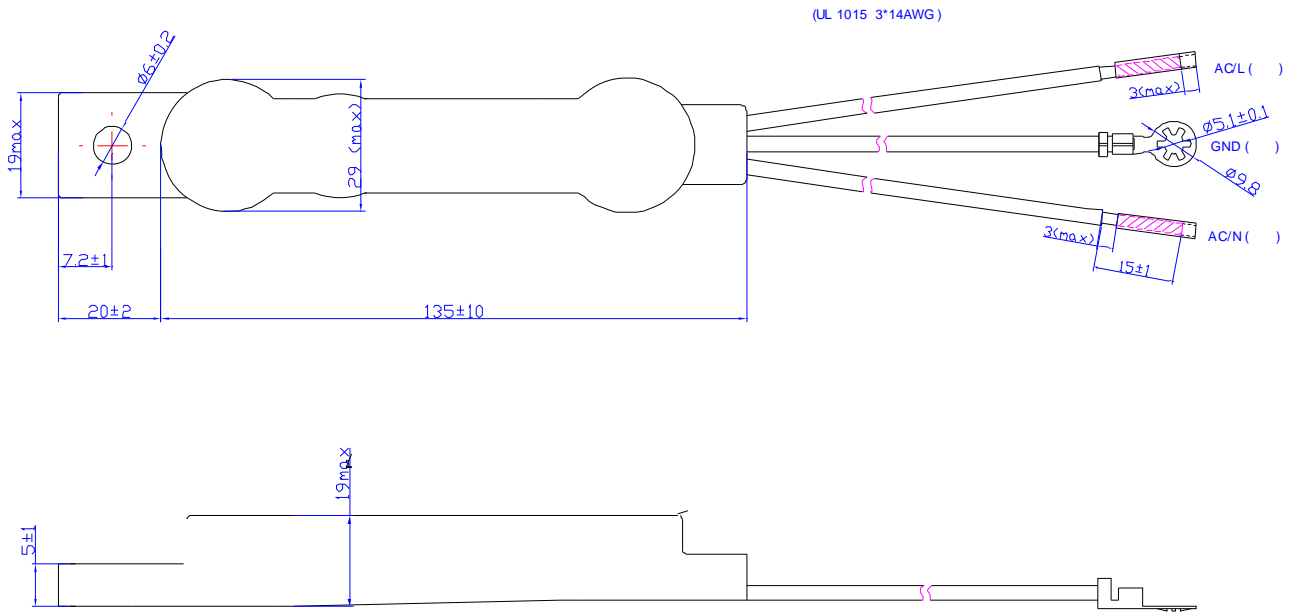

PROJ : ±1.5

2018-03-30	A	/	/	/
2018-04-20	B	/		
2018-08-28	C	/		